

SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form


Perforated Plastic 3/4" Hanging Strap

DESCRIPTION

Duro Dyne Perforated Plastic 3/4" Hanging Strap is UV Resistant - ASTM G154-12a. It is non-abrasive and often used on flexible duct, hard pipe, hydronic piping fastening, and all light HVAC hanging and strapping needs. It is bright yellow color for easy identification. Perforated Plastic Hanging Strap is sold in 100' rolls and is easy to cut to any length.

FEATURES

- Holes at 3/4" centers
 - - 3/4" wide
 - 100 ft long roll
 - .062" thick
 - UV Resistant
 - ASTM G154-12a
 - Durable
 - Non abrasive
 - Flexible
 - Non-conductive
 - Bright yellow color for easy identification
 - Cut to any length with HVAC Snips
 - Recommended operating temperature range:
 - 5° - 40°C (23° - 104°F)
 - Melting temperature:
 - 180 - 200°C (356° - 392°F).
 - Ideal for use on:
 - Flexible duct
 - Hard Pipe
 - Hydronic Piping Fastening
 - All light HVAC hanging and strapping needs
 - Testing to a pull strength of approx. 180 lbs.
- Please NOTE:** Pull strength may vary significantly dependent on application and environmental conditions.

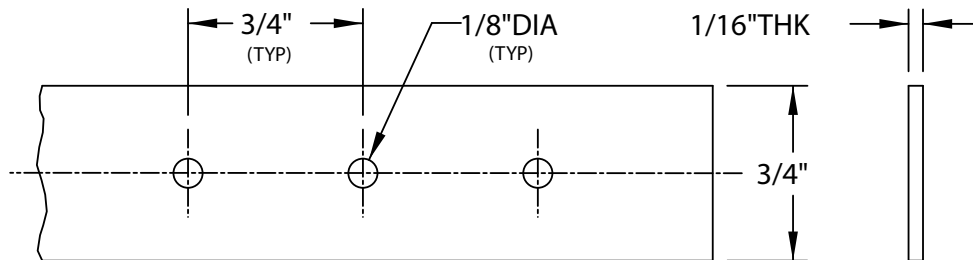

ITEM#	CODE	DESCRIPTION	QTY
13182	PPF34-100	Perforated Plastic 3/4" Hanging Strap	100ft/roll

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346
 Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com



©2021 Duro Dyne Corporation
 Printed in USA 4/9/21
 BO050038