

ROD LOC INSERTION MACHINE

GENERAL DESCRIPTION

The Rod-Loc Insertion Machine offers contractors a fast and convenient way to set up rod locks and conduit. It runs off of a standard 110 volt outlet and a 70 PSI minimum air supply. Simply place either 3/4" or 1/2" conduit in the cradle and a rod loc on each side, and by the flip of a switch the air cylinder inserts a rod lock on both ends simultaneously of hollow conduit at the perfect inset spacing, eliminating the old timely hammer in method! Footswitch accessory also available.

FEATURES



- Standard 110 volt outlet & 70 PSI minimum air supply
- Works with 3/4" or 1/2" conduit
- Inserts a rod lock on both ends simultaneously
- Perfect inset spacing!
- Eliminates use of hammer in method or air chisel insertion

Scan for
Prototype video



INCLUDED WITH UNIT

- 3-magnetic blocks for the 1/2" conduit.
- 3-magnetic blocks for the 3/4" conduit.
- 48" long extension to accommodate up to 6' conduit
- Mounting accessories for mounting the unit to a flat surface
- Package of each 1/2" and 3/4" Dyn-O-Loc® nut & bolts to get started

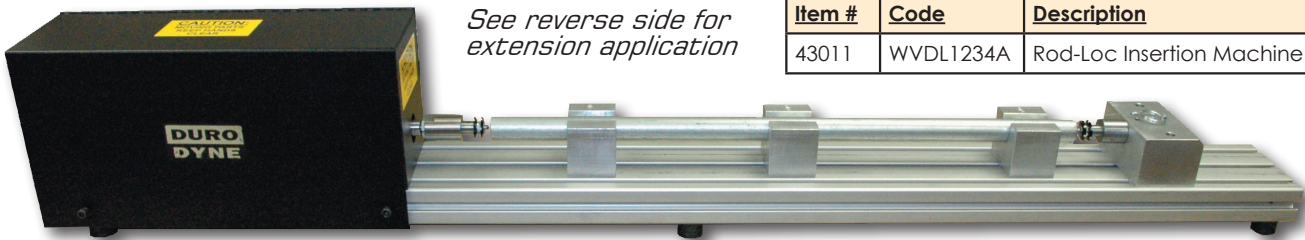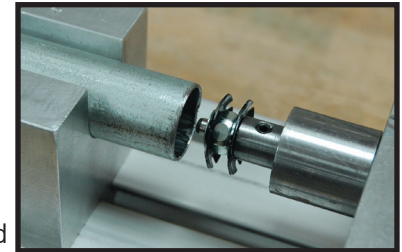

See reverse side for
extension application

Item #	Code	Description
43011	WVDL1234A	Rod-Loc Insertion Machine

Works great with Dyn-O-Locs®!




Item #	Code	Description	Pkg.	Weight (lbs.)
20197	DOMRL12	1/2" Dyn-O-Loc	250/Box	13
21098	DOMRL34	3/4" Dyn-O-Loc	250/Box	13

Locks conveniently packed
in separate poly bag.

Bolts (with washer
attached) packed
underneath locks.



3/4" magnetic blocks pictured above.
Also comes with 1/2" blocks.

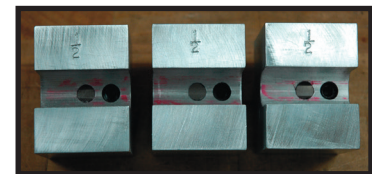

MACHINERY DIVISION
© 2016 Duro Dyne Corporation
Printed in USA 12/21/16
BC043402

**DURO
DYNE**®


INCLUDED WITH UNIT

- 3-magnetic blocks for the 1/2" conduit.
- 3-magnetic blocks for the 3/4" conduit.
- 48" long extension to accommodate up to 6' conduit
- Mounting accessories for mounting the unit to a flat surface
- Package of each 1/2" and 3/4" Dyn-O-Loc® nut & bolts to get started



Allen Key 1/2" blocks 3/4" blocks 1/2" & 3/4" Dyn-O-Locs® sets included

Blocks are magnetic for secure insertion

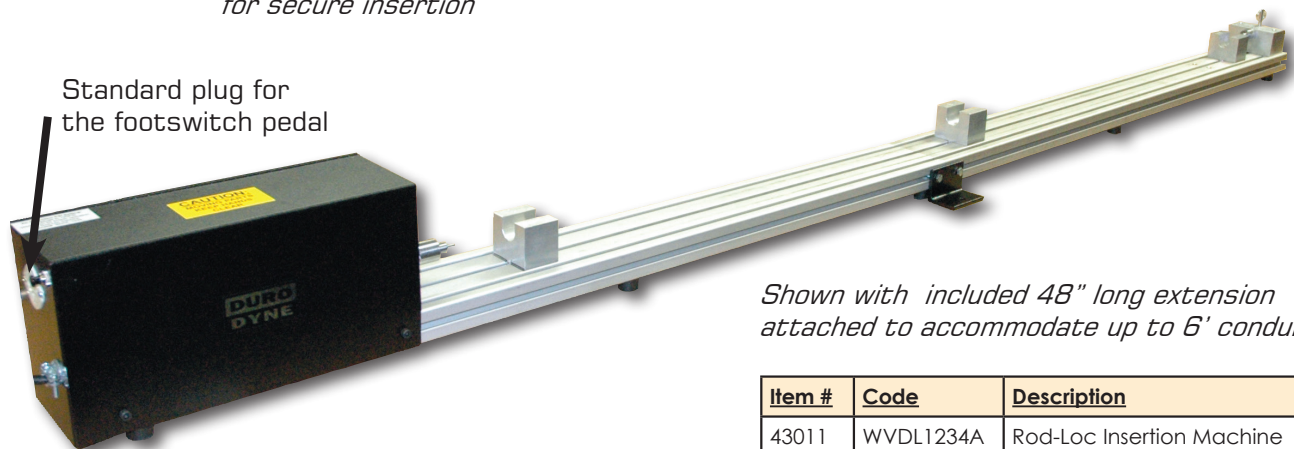

Shown with included 48" long extension attached to accommodate up to 6' conduit

Item #	Code	Description
43011	WVDL1234A	Rod-Loc Insertion Machine

ADDITIONAL ACCESSORIES (not included)

The cast aluminum foot pedal from Duro Dyne comes standard with certain models of machinery to free up the operators hand for easier material handling. It is a light, durable, cast aluminum foot pedal and features a large opening to accommodate today's steel/composite toe boots.

- Extra Heavy Duty
- Cast aluminum
- Large opening to accommodate steel/composite boots
- 16 ft. cable length

Item #	Description
17372	Footswitch



● Duro Dyne East Division, Bay Shore, NY	631-249-9000	Fax: 631-249-8346	●
● Duro Dyne Midwest Division, Hamilton, OH	513-870-6000	Fax: 513-870-6005	●
● Duro Dyne West Division, Fontana, CA	562-926-1774	Fax: 562-926-5778	●
● Duro Dyne Canada, Lachine, Quebec, Canada	514-422-9760	Fax: 514-636-0328	●
www.durodyne.com E-mail: durodyne@durodyne.com			