




SPEED CORNER

Speed Corners are manufactured from 12-gauge steel.

Opposing size holes for 10 3/4 Pro Point screws

Tapered tip for easy insertion into flange

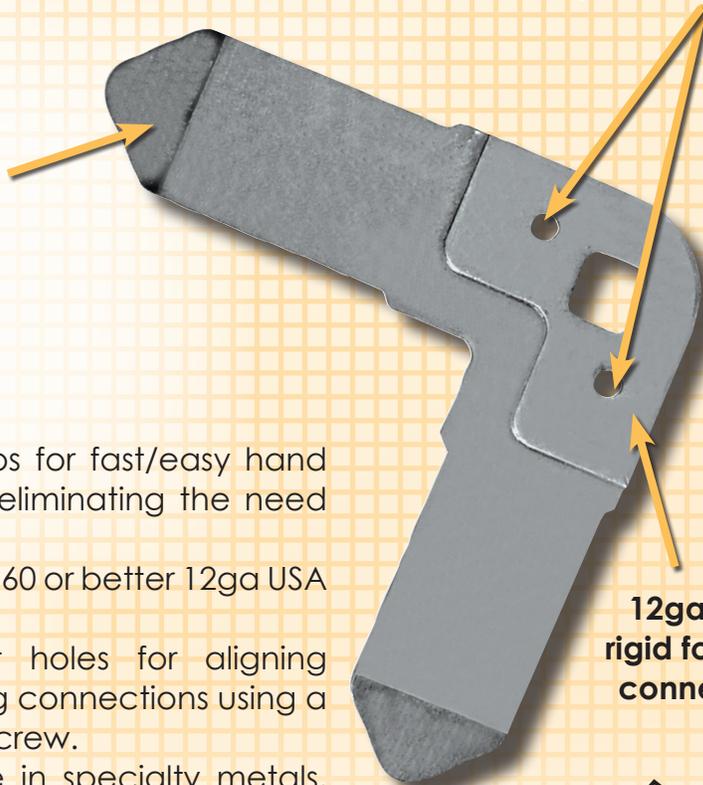

12ga for a rigid four bolt connection

FEATURES:

- For use with J Flange.
- Tapered coined corner tips for fast/easy hand insertion in to the Flange eliminating the need for a finner's hammer.
- Formed from galvanized G 60 or better 12ga USA made steel.
- Opposing size alignment holes for aligning flange or optionally making connections using a standard 10 3/4 Pro Point screw.
- Speed Corner is available in specialty metals, call for pricing.
- Meets SMACNA rigidity class J as used in conjunction with Dyn-O-Mate J Flange.



Ordering Information

Item #	Code	Description	Quantity
21094	DDJS	J Speed Corner	250/box
21095	DDJSNB	J Speed Corner with nuts + bolts	250/box

Duro Dyne East Division, Bay Shore, NY **631-249-9000** **Fax: 631-249-8346**
Duro Dyne Midwest Division, Hamilton, OH **513-870-6000** **Fax: 513-870-6005**
Duro Dyne West Division, Fontana, CA **562-926-1774** **Fax: 562-926-5778**
Duro Dyne Canada, Lachine, Quebec, Canada **514-422-9760** **Fax: 514-636-0328**
www.durodyne.com **E-mail: durodyne@durodyne.com**



© Duro Dyne Corp.
Printed in USA 11/16
BF013412