

SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form Titanium Dyn-O-Ties® DNHDG

DESCRIPTION


Whenever your job calls for securing round flexible duct to outlets, pipes or fittings, you can do the job better, faster, and at a lower cost using Titanium DYN-O-TIES®, flexible duct ties. DYN-O-TIES, when properly installed, provide a secure connection of flexible duct listed by Underwriters Laboratories Inc., class 1.

FEATURES

- Virgin Nylon 6/6. This Nylon 6/6 conforms to the following:
 - ASTM - Conforms to ASTM D-4066 PA 0111
 - Federal - Conforms to Federal Specification LP-410a
 - Military - Conforms to Military Specification MIL-M-20693B
 - RoHS Compliant
 - UL94 Flammability Class rating of V-2
 - UL Air Handling Approved with a rating of AH-2 Plenum Rated.
- Titanium Gray Color
- Maximum Operating Temp: 185°F (85°C)
- Tensile Rating: 175 lbs. (779 N)
- Made in the USA
- Easy to identify, marked with UL for inspection

STORAGE

To ensure superior performance, nylon cable tie products should be stored in a sealed polyethylene bag at room temperature in at least 50% humidity (recommended 80% RH). Limit the exposure of unused cable ties to extreme heat and cold. Should cable ties be exposed to extreme temperatures and/or extreme relative humidity, store at room temperature and at least 50% humidity (recommended 80% RH) for at least 24 hrs in a sealed bag prior to further use.



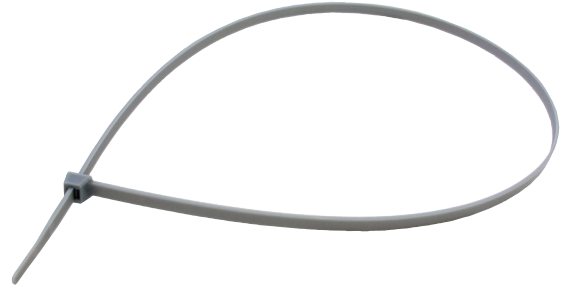


Easy to identify,
marked with UL for inspection



TYPE 21
29FC
Listed
181B-C

Tensile Rating: 175 lbs. (779 N)

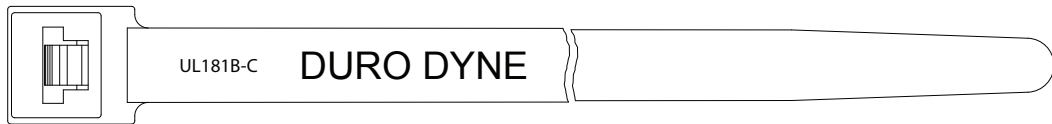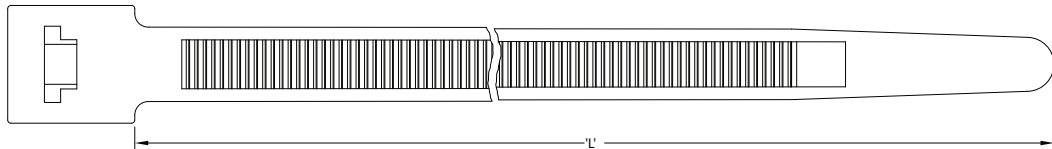

ITEM #	CODE	DESCRIPTION	COLOR	LENGTH	MAX. DIA.	PKG.	PKG./CTN
7116	DN36HDG	36" Heavy Duty Gray Titanium Nylon Dyn-O-Tie - USA Made	Gray	36"	11"	50	10

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346
 Duro Dyne Midwest Division, Hamilton, OH 513-870-6000 Fax: 513-870-6005
 Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778
 Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328

www.durodynecanada.ca E-mail: durodynecanada@durodyne.com



©2019 Duro Dyne Corporation
 Printed in USA 2/1/19
 DDC 06/19 JB