



SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form Cleats

DYN-O-MATE Cleat


- DOM-CLT for use with DOMJ & DOMH 20 gauge flanges for airtight duct connections.
- DOM-CLT is manufactured from 20 gauge galvanized steel 6" pieces.

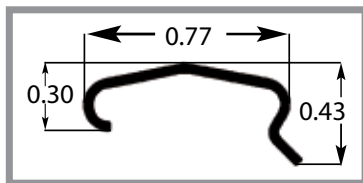


Item #	Code	Description
21250	DOMCLT	6in. Metal Cleat

Quad Cleat


- DOM-QCLT125 & HDQC-PLUS125 are compatible with Dyn-O-Mate® J, Ductmate™ 35, CL Ward™ J, Ward Industries™ J, Hardcast™ flanges, TDC, TDF and TDX Connections, and is manufactured from 22 gauge steel.
- HDQC-PLUS125 is recommended for high pressure, heavy duty transverse duct.
- PQCLT is rated UL94-V0. PVC Material is compliant to ASTM D1784.

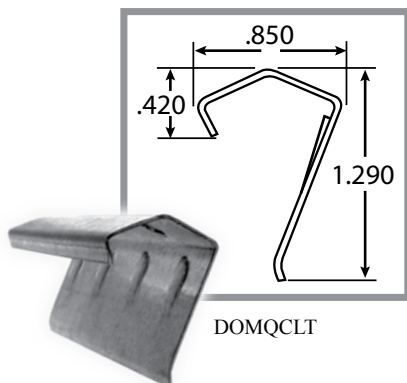

DOMQCLT

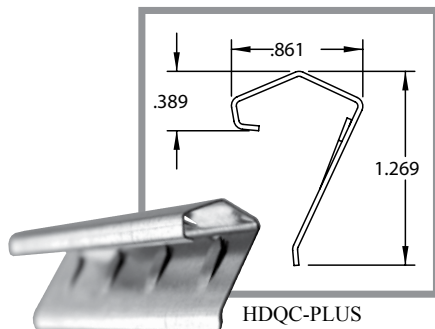

HDQC-PLUS

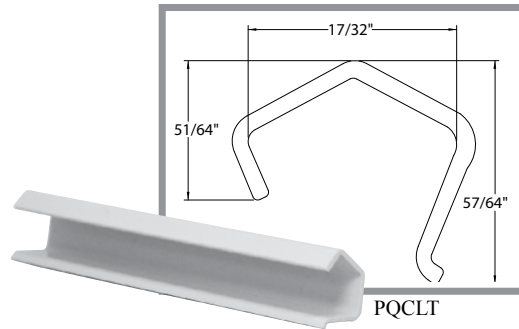

PQCLT

Item #	Code	Description
13096	DOMQCLT125	Metal Quad Cleat (1/2 box qty)
13100	QXCLT20-125	Metal Quad Cleat 20ga (1/2 box qty)
13175	HDQCPLUS125	Heavy Duty Quad Cleat Plus (1/2 box qty)
13108	PQCLT	Extruded 6" PVC Quad Cleat

See reverse side for TDC/TDF Cleat

Installation Recommendations

1/2" to 2" sp - 1 piece on 24" centers
 2" to 3" sp - 1 piece on 18" centers
 4" to 6" sp - 1 piece on 12" centers
 Over 10" sp - continuous cleat

SUBMITTAL RECORD



JOB _____
LOCATION _____
SUBMITTED TO _____
SUBMITTAL PREPARED BY _____
APPROVED BY _____
DATE _____



Submittal Form Cleats

TDC/TDF Cleat

- For use with TDC/TDF connection.
- TDC-2230/TDF-2230 is 22 gauge steel formed into lengths of 30" long and divided into five 6" cleats that are partially cut through allowing them to be easily separated into 6" pieces.

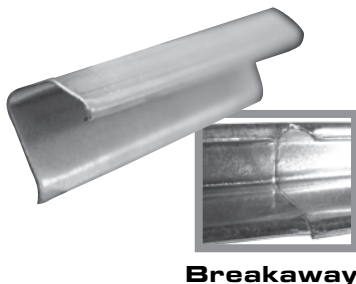

Item #	Code	Description
13230	TDC2230	6in. TDC (Pre-Scored Cleat)
13231	TDF2230	TDF 6in. Metal (Pre-Scored Cleat)
21253	TDF-PCLT	6in. Plastic Cleat

See reverse side for Dyn-O-Mate & Quad Cleats

Installation Recommendations

1/2" to 2" sp - 1 piece on 24" centers
2" to 3" sp - 1 piece on 18" centers
4" to 6" sp - 1 piece on 12" centers
Over 10" sp - continuous cleat

Duro Dyne Corporate Headquarters, Bay Shore, NY
631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
www.durodyne.com • E-mail: durodyne@durodyne.com



©2020 Duro Dyne Corporation
Printed in USA 3/2020
BO050006