




# FLANGE

## DOMJ FLANGE

### FEATURES:


- Designed to strengthen the duct wall and connect duct sections together.
- Furnished with an integrated butyl sealant pocket for a secure air tight fit.
- Manufactured from 20-gauge steel in 10ft., 12ft. & 20ft. lengths.
- DOMJ is designed for large commercial and high-pressure applications.
- Bundles of 20ft. lengths available only with a Full Truckload order.
- Specialty metal available upon request.

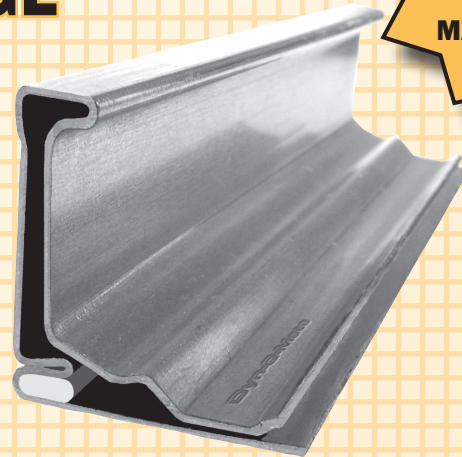

## DOMH FLANGE

### FEATURES:

- Designed to strengthen the duct wall and connect duct sections together.
- Furnished with an integrated sealant pocket for a secure air tight fit.
- Manufactured from 22-gauge steel in both 12ft. & 20ft. lengths.
- DOMH is designed for low to medium pressure or residential applications.
- Bundles of 20ft. lengths available only with a Full Truckload order.
- Specialty metal available upon request.

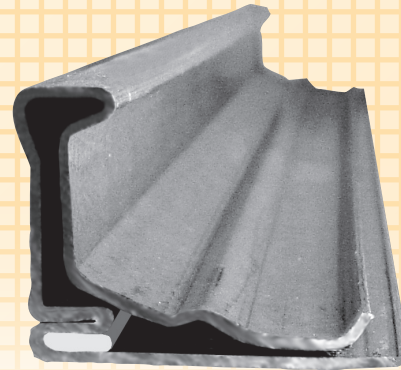

### Ordering Information

Item #	Code	Description	Quantity
21230	DOMJ20	J Flange - 20 ft.	50-20ft.
21236	DOMJ20SS	Stainless Steel J Flange - 20 ft.	50-20ft.
21238	DOMJ20AL	Aluminum J Flange - 20 ft.	50-20ft.
21234	DOMJ12	J Flange - 12 ft.	100-12ft.
21233	DOMJ10	J Flange - 10 ft.	50-10ft.
21231	DOMH20	H Flange - 20 ft.	50-20ft.
21235	DOMH12	H Flange - 12 ft.	100-12ft.

Duro Dyne East Division, Bay Shore, NY  
 Duro Dyne Midwest Division, Hamilton, OH  
 Duro Dyne West Division, Fontana, CA  
 Duro Dyne Canada, Lachine, Quebec, Canada  
[www.durodyne.com](http://www.durodyne.com)

631-249-9000 Fax: 631-249-8346  
 513-870-6000 Fax: 513-870-6005  
 562-926-1774 Fax: 562-926-5778  
 514-422-9760 Fax: 514-636-0328  
 E-mail: [durodyne@durodyne.com](mailto:durodyne@durodyne.com)



© Duro Dyne Corp.  
 Printed in USA 11/15/16  
 BF013422