




QUAD CLEAT® & QUAD CLEAT® PLUS


The Heavy Duty Quad Cleat Plus is designed specifically for high pressure, heavy duty transverse duct.

Creating a secure seal between sections of ductwork is important to minimizing system leakage. Sections of duct utilizing four bolt flange systems must sit securely against the gasket installed between mating ductwork. While corners of duct are bolted together, the flange between the bolts utilize cleats to apply pressure to the flanges, encapsulated gasket and eliminate deflection.

Both Quad Cleats incorporate embossed "darts" which help the cleat lock firmly onto the flange. It is a universal fastener for use with most commercial size flanges. If you use more than one brand of flange, this eliminates the need to stock more than one cleat.

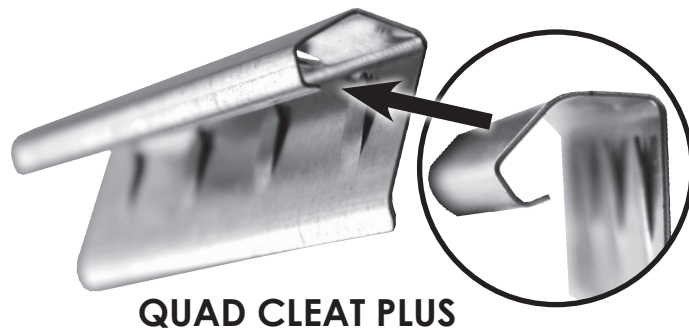


QUAD CLEAT PLUS

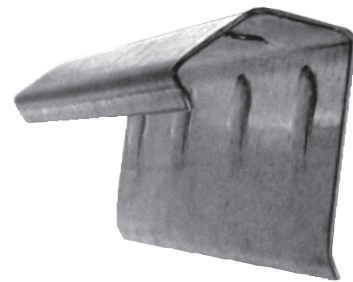

QUAD CLEAT

FEATURES

- Both are compatible with virtually all brands and types of duct connection methods on the market - making it necessary to stock only one cleat.
- QXCLT20-125 is manufactured from 20 ga galvanized steel
- DOMQCLT & HDQCPLUS125 are manufactured from 22 ga galvanized steel
- Other gauges and materials available upon request.

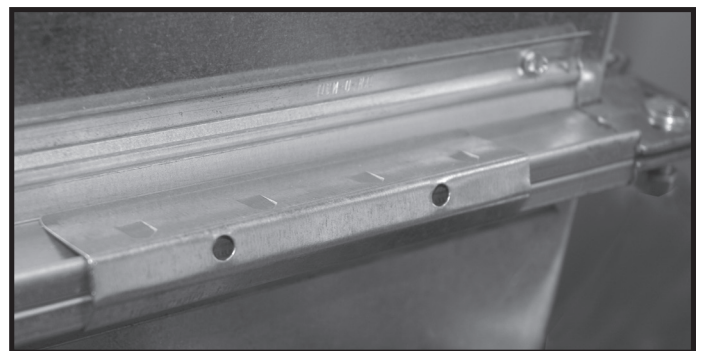

Item #	Code	Description	Weight (lbs.)	Packaging
13096	DOMQCLT	6in. Quad Cleat 22ga	TBD	125' - 250 6" pcs/box
13100	QXCLT20-125	6in. Quad Cleat 20ga	TBD	125' - 250 6" pcs/box
13175	HDQCPLUS125	6in. Heavy Duty Quad Cleat 22ga	TBD	125' - 250 6" pcs/box

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346
 Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
www.durodyne.com • E-mail: durodyne@durodyne.com



© 2021 Duro Dyne Corp.
 Printed in USA 6/8/2021
 BF013415