


SUBMITTAL RECORD _____
JOB _____
LOCATION _____
SUBMITTED TO _____
SUBMITTAL PREPARED BY _____
APPROVED BY _____
DATE _____

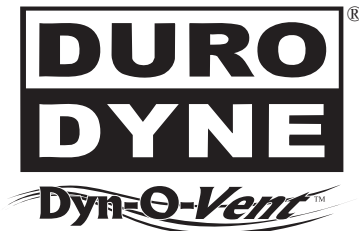

Specification Form



SW2W

SIDEWALL REGISTER

2-WAY

FEATURES

- Steel construction
- 1/2" spaced fins
- One-piece stamped face construction
- Two-way air deflection
- For sidewall or ceiling application
- Available in white durable finish

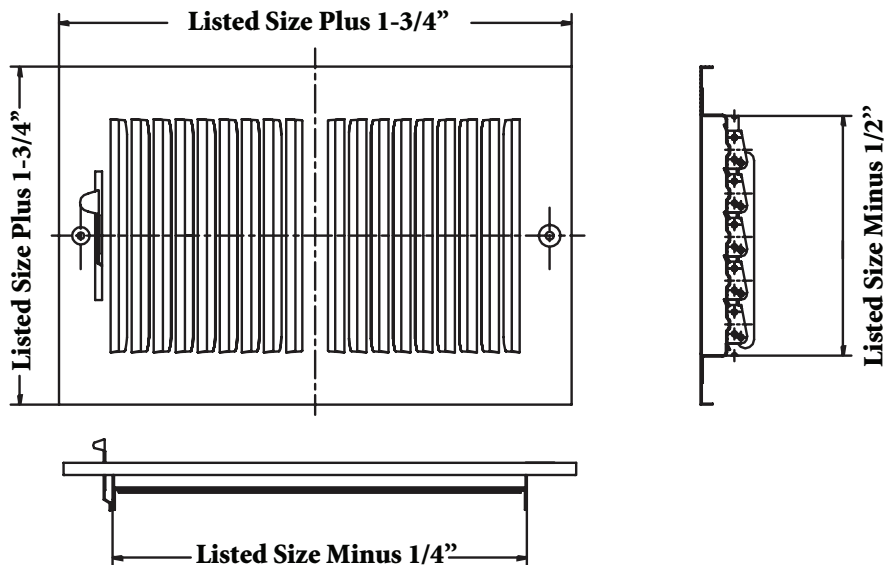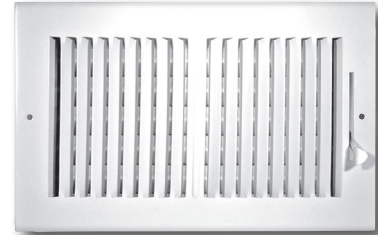

2-WAY

Duro Dyne East Division, Bay Shore, NY	631-249-9000	Fax: 631-249-8346
Duro Dyne Midwest Division, Fairfield, OH	513-870-6000	Fax: 513-870-6005
Duro Dyne West Division, Santa Fe Springs, CA	562-926-1774	Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada	514-422-9760	Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com		



©2013 DURO DYNE CORP.
Printed in the USA 7/13
BO000308

SW2W - SIDEWALL REGISTER PERFORMANCE DATA

Face Velocity		300	400	500	600	700	800	900	1000
Pressure Loss		.006	.010	.016	.022	.031	.040	.050	.062
6 x 6 Ak .105	CFM Throw	30 3.0	40 3.5	50 4.5	65 6.0	75 7.0	85 8.0	95 9.0	105 10.0
8 x 4 Ak .090	CFM Throw	25 2.0	35 3.5	45 4.5	55 5.5	65 6.5	70 7.0	80 8.0	90 9.0
8 x 8 Ak .200	CFM Throw	60 4.0	80 5.5	100 7.0	120 8.0	140 9.5	160 11.0	180 12.5	200 13.5
10 x 4 Ak .115	CFM Throw	35 3.0	45 4.0	60 5.0	70 6.0	80 7.0	90 8.0	105 9.0	115 10.0
10 x 6 Ak .185	CFM Throw	55 4.0	75 5.0	95 6.5	110 8.0	130 9.0	150 10.5	165 12.0	185 13.0
10 x 10 Ak .310	CFM Throw	95 5.0	125 7.0	155 8.5	185 10.0	215 12.0	250 14.0	280 15.5	310 17.0
12 x 4 Ak .140	CFM Throw	40 3.5	55 4.5	70 5.5	85 6.5	100 8.0	110 9.0	125 10.0	140 11.5
12 x 6 Ak .225	CFM Throw	70 4.5	90 6.0	115 7.5	135 8.5	160 10.5	180 12.0	205 13.0	225 14.5
12 x 8 Ak .320	CFM Throw	95 5.5	130 7.0	160 9.0	190 10.5	225 12.5	255 14.0	290 16.0	320 18.0
12 x 12 Ak .470	CFM Throw	140 6.5	190 8.5	235 10.5	280 12.5	330 15.0	375 17.0	425 19.0	470 21.0
14 x 6 Ak .290	CFM Throw	85 5.0	115 6.5	145 8.5	175 10.0	205 11.5	230 13.5	260 15.0	290 17.0
14 x 8 Ak .390	CFM Throw	115 6.0	155 8.0	195 10.0	235 12.0	275 14.0	310 16.0	350 18.0	390 20.0

Terminal Velocity of 75 FPM