


## Quad Cleat® Plus




The Heavy Duty Quad Cleat Plus is designed specifically for high pressure, heavy duty transverse duct.

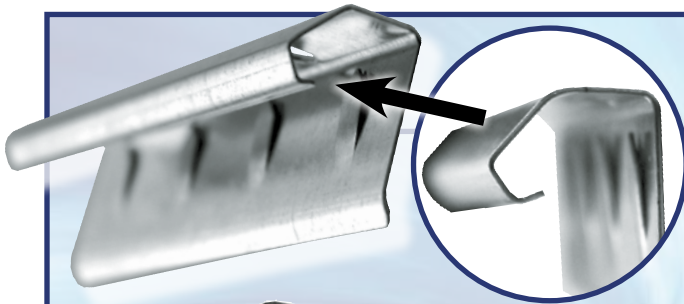

## Quad Cleat®

Creating a secure seal between sections of ductwork is important to minimizing system leakage. Sections of duct utilizing four bolt flange systems must sit securely against the gasket installed between mating ductwork. While corners of duct are bolted together, the flange between the bolts utilize cleats to apply pressure to the flanges, encapsulated gasket and eliminate deflection.

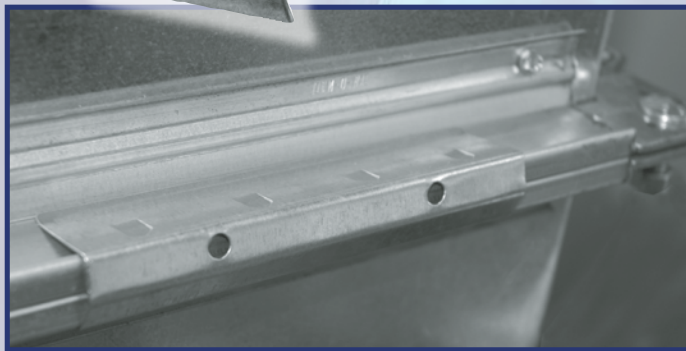

Both Quad Cleats incorporate embossed "darts" which help the cleat lock firmly onto the flange. It is a universal fastener for use with most commercial size flanges. If you use more than one brand of flange, this eliminates the need to stock more than one cleat.

### FEATURES

- Both are compatible with Dyn-O-Mate® J, Ductmate™ 35, CL Ward™ J, Ward Industries™ J, Hardcast™ flanges, TDC, TDF and TDX Connections
- QXCLT20-125 is manufactured from 20 ga galvanized steel
- DOMQCLT, HDQC-PLUS, & HDQC-PLUS-SS are manufactured from 22 ga galvanized steel
- Other gauges and materials available upon request.

### Ordering Information

Item #	Code	Description	Quantity	Weight (lbs.)
21259	DOMQCLT	Quad Cleat - 5-3/4" - 22ga	240' - 500 5-3/4" pcs/box	40
13100	QXCLT20-125	Quad Cleat - 6" - 20ga	125' - 250 6" pcs/box	TBD
21269	HDQC-PLUS	Heavy Duty Quad Cleat Plus - 6" - 22ga	250' - 500 6" pcs/box	40
21228	HDQC-PLUS-SS	Heavy Duty Quad Cleat Plus - Stainless Steel 6" - 22ga	250' - 500 6" pcs/box	TBD

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346  
 Duro Dyne Midwest Division, Hamilton, OH 513-870-6000 Fax: 513-870-6005  
 Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778  
 Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328  
 www.durodyne.com E-mail: durodyne@durodyne.com



© 2019 Duro Dyne Corp.  
Printed in USA 1/19  
BF013415