




Dyna-Tite®

Swaged Dyna-Stud

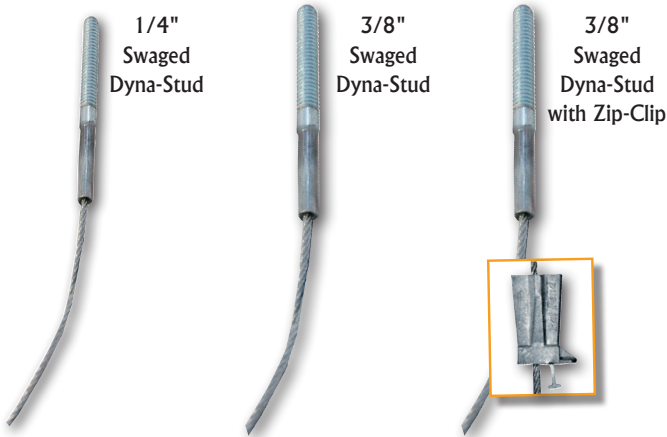

There are many ways to suspend duct work from a concrete or steel structure. One of the most common methods is to screw threaded rod into internally threaded expansion anchors. Sizing the threaded rod and using washers and nuts to complete support structures is time consuming. Dyna-Studs used with Dyna-Tite cable locks can greatly decrease labor time for constructing suspension systems.

The Dyna-Stud is a heavy duty threaded stud with one end of an aircraft rated cable attached. The stud is threaded into the expansion anchor without putting stress on the cable. This makes for a much safer and tighter connection. The raw end of the cable, in conjunction with the cable lock, is used to attach the object being supported.

Ordering Information

Item #	Code	Description	For Use w/ Cable Lock^	Safe Working Load* +	Packaged
30052	SDSA1405WC3	1/4 Swaged Threaded Stud x 5ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30053	SDSA1410WC3	1/4 Swaged Threaded Stud x 10ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30054	SDSA1415WC3	1/4 Swaged Threaded Stud x 15ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30055	SDSA1425WC3	1/4 Swaged Threaded Stud x 25ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bg/bx
30056	SDSA3805WC4	3/8 Swaged Threaded Stud x 5ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	10/bag-10bg/bx
30057	SDSA3810WC4	3/8 Swaged Threaded Stud x 10ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	10/bag-5bg/bx
30058	SDSA3815WC4	3/8 Swaged Threaded Stud x 15ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	10/bag-5bg/bx
30059	SDSA3825WC4	3/8 Swaged Threaded Stud x 25ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	5/bag-5bg/bx
30075	SDSA3805ZC	3/8 Swaged Threaded Stud x 5ft Dyna-Stud Cable Assembly with Zip-Clip	Zip-Clip	25-220 lbs. (12-100 kg)	10/bag-10bg/bx
30076	SDSA3810ZC	3/8 Swaged Threaded Stud x 10ft Dyna-Stud Cable Assembly with Zip-Clip	Zip-Clip	25-220 lbs. (12-100 kg)	10/bag-10bg/bx
30077	SDSA3815ZC	3/8 Swaged Threaded Stud x 15ft Dyna-Stud Cable Assembly with Zip-Clip	Zip-Clip	25-220 lbs. (12-100 kg)	10/bag-10bg/bx
30078	SDSA3825ZC	3/8 Swaged Threaded Stud x 25ft Dyna-Stud Cable Assembly with Zip-Clip	Zip-Clip	25-220 lbs. (12-100 kg)	5/bag-10bg/bx

1/4" & 3/8" drop ins sold seperately.

Item #30075 - 30078 come with Zip-Clip Cable Lock.

^ Cable Lock not included

*Safe Working Loads are based on a 5:1 Safety Factor

+ Hanging at angles will reduce the Safe Working Loads. Please see our 'Effects of Hanging at Angles' table <http://www.durodyne.com/DTTesting.php>

Duro Dyne East Division, Bay Shore, NY
 Duro Dyne Midwest Division, Hamilton, OH
 Duro Dyne West Division, Fontana, CA
 Duro Dyne Canada, Lachine, Quebec, Canada
www.durodyne.com E-mail: durodyne@durodyne.com

631-249-9000 Fax: 631-249-8346
 513-870-6000 Fax: 513-870-6005
 562-926-1774 Fax: 562-926-5778
 514-422-9760 Fax: 514-636-0328



© Duro Dyne Corp.
 Printed in USA 7/26/17
 BD030413

Please visit our website www.durodyne.com for the most current product information.