




DYNA-HAMMER

FOR PITTSBURGH LOCK

The Dyna-Hammer puts an end to manual hammering. Just a couple of taps at the center and ends of standard length duct to secure, then the Dyna-Hammer does all of the work. Radius fittings and straight line duct get powerfully knocked down at approximately 20 feet per minute on 14 to 30 gauge metal. Features an ergonomic, multi-stage trigger throttle, for better control during use. Included multi-directional air hose swivel prevents hose restriction during operation. Manufactured of 100% high grade tool steel for durability and trouble-free years of use.

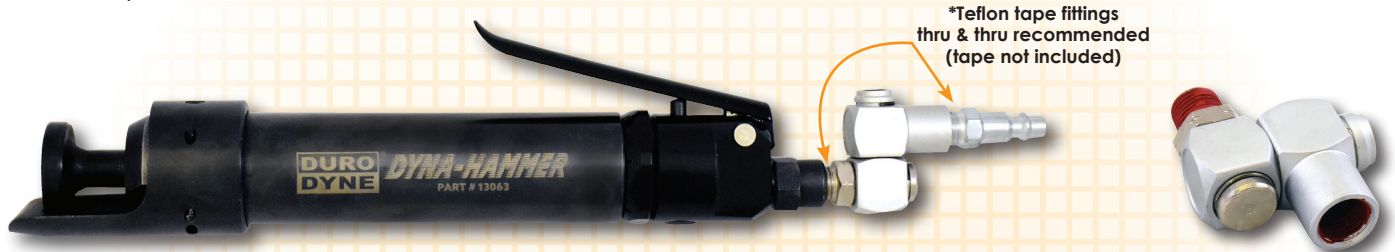


*Teflon tape fittings thru & thru recommended (tape not included)

Replacement Swivel Tip

Features

- Tremendous labor saving solution over traditional Pittsburgh closing
- 20 feet per minute, dependant on gauge
- 4500 beats per minute
- Knocks down up to 14 ga ductwork with minimal effort, and as light as 30 ga metal
- Multi-directional swivel fitting and adaptor included
- Side throttle lever for ease of use and better control than push style triggers
- Requires 80 psi
- Overall length: 12"
- Air consumption 15 cfm
- Air inlet 1/4 NPT (included)
- Air hose recommended for optimal performance: 3/8"
- Allen key included for custom guide adjustment
- 5.35 lbs. overall weight, for less fatigue while operating the Dyna-Hammer
- 2 year common sense warranty, at Duro Dyne's discretion

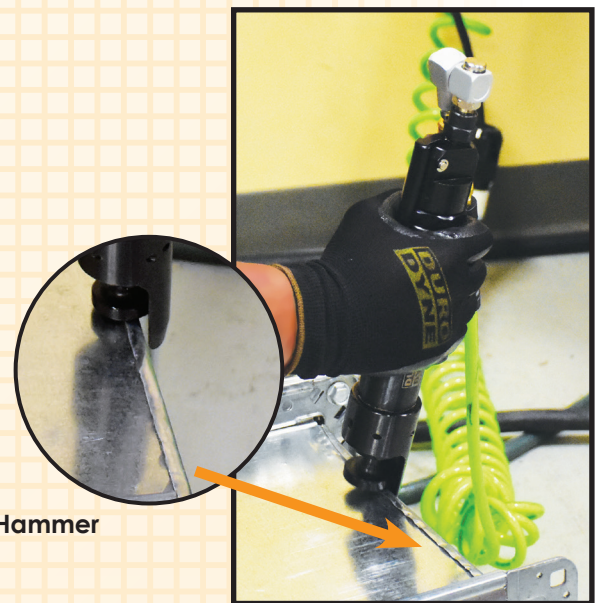

*Teflon tape all fittings for no air leakage when under pressure (Teflon tape not included)

Ordering Information

Item #	Code	Description
13063	PDH	Dyna-Hammer for Pittsburgh Lock
13097	PDH-S	Dyna-Hammer Swivel Tip

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346
 Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com

**DURO
DYNE**®
 © Duro Dyne Corp.
 Printed in USA 1/22/21
 BF013437